

SPACCALEGNA
LOG-SPLITTERS

TAGLIATRONCHI
SAW BENCHES



CUTMAC®
CUTMAC®

DOCMA®
Made in Italy

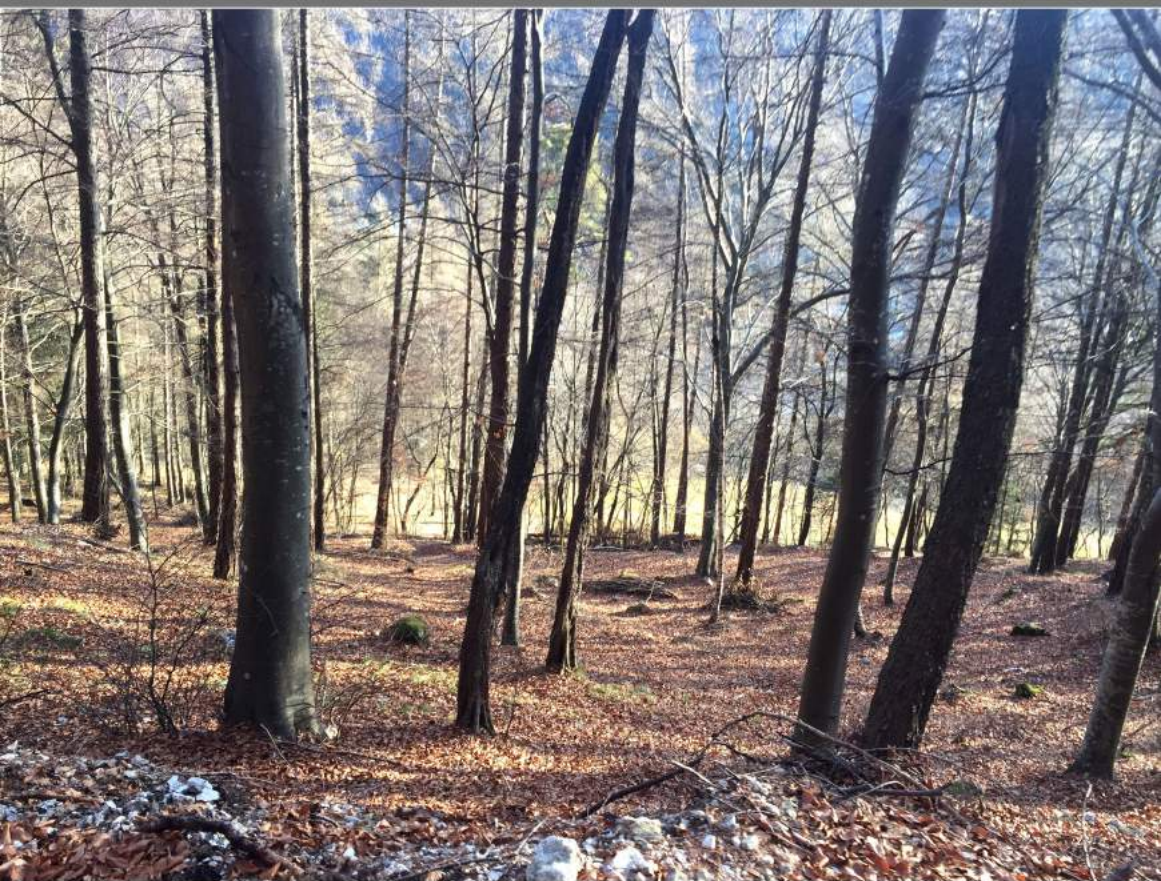

SF75 XX

VERTICAL
VERTICALE

CYLINDER CAPACITY: CORSA CILINDRO: 500 mm		CUT CAPACITY: ALTEZZA TAGLIO: 545 mm	OIL QUANTITY: QUANTITA' OLIO: 7 l	WEDGE STROKE: CORSA COLONNA: ADJUSTABLE / REGOLABILE	WEIGHT: PESO: 102 kg
CODE	VERSION	TECHNICAL DATA		TONS	MEASURES:
910060	SF75 220 XX	EL. HP3 (2,2 kW) - 220 V - PS		7,00	60X56X110 cm
910061	SF75 380 XX	EL. HP3 (2,2 kW) - 380 V - PS		7,50	60X56X110 cm
910062	SF75 RAPID 220 XX	EL. HP3 (2,2 kW) - 220 V - DP		8,00	60X56X110 cm
910063	SF75 RAPID 380 XX	EL. HP3 (2,2 kW) - 380 V - DP		8,00	60X56X110 cm
910064	SF75 BENZ ROBIN XX	SC. ROBIN HP6 - 170 cc - PS		7,50	70X56X110 cm

CAPTION: PS = SINGLE PUMP - DP = DOUBLE PUMP - EL = ELECTRIC MOTOR - SC = ENGINE POWERED - PTO FM = FEMALE JUNCTION TO TRACTOR - PTO MS = PTO MALE JUNCTION TO TRACTOR - 3P = 3 LINKS - ST = CONNECTION WITH HYDRAULIC PIPES.

LEGENDA: PS = POMPA SINGOLA, DP = DOPPIA POMPA, EL = MOTORE ELETTRICO, SC = MOTORE A SCOPPIO, PTO FM = PTO ATTACCO FEMMINA, PTO MS = PTO ATTACCO MASCHIO, 3P = ATTACCO A 3 PUNTI, ST = SOLO TUBI IDRAULICI.



SF80 XX

VERTICAL
VERTICALE

CYLINDER CAPACITY: CORSA CILINDRO: 500 mm		CUT CAPACITY: ALTEZZA TAGLIO: 545 mm	OIL QUANTITY: QUANTITA' OLIO: 8 l	WEDGE STROKE: CORSA COLONNA: ADJUSTABLE / REGOLABILE	WEIGHT: PESO: 122 kg
CODE	VERSION	TECHNICAL DATA		TONS	MEASURES:
910066	SF80 220 XX	EL. HP3 (2,2 kW) - 220 V - PS		7,00	72X64X112 cm
910067	SF80 380 XX	EL. HP3 (2,2 kW) - 380 V - PS		7,50	72X64X112 cm
910068	SF80 380/4 XX	EL. HP4 (3,0 kW) - 380 V - PS		8,00	72X64X112 cm
910069	SF80 RAPID 220 XX	EL. HP3 (2,2 kW) - 220 V - DP		8,00	72X64X112 cm
910070	SF80 RAPID 380 XX	EL. HP3 (2,2 kW) - 380 V - DP		8,00	72X64X112 cm
910071	SF80 RAPID 380/4 XX	EL. HP4 (3,0 kW) - 380 V - DP		8,00	72X64X112 cm
910072	SF80 BENZ ROBIN XX	SC. ROBIN HP6 - 170 cc - PS		7,50	82X64X112 cm
910073	SF80 RAPID BENZ ROBIN XX	SC. ROBIN HP6 - 170 cc - DP		8,00	82X64X112 cm


CAPTION: PS = SINGLE PUMP - DP = DOUBLE PUMP - EL = ELECTRIC MOTOR - SC = ENGINE POWERED - PTO FM = FEMALE JUNCTION TO TRACTOR - PTO MS = PTO MALE JUNCTION TO TRACTOR - 3P = 3 LINKS - ST = CONNECTION WITH HYDRAULIC PIPES.

LEGENDA: PS = POMPA SINGOLA, DP = DOPPIA POMPA, EL = MOTORE ELETTRICO, SC = MOTORE A SCOPPIO, PTO FM = PTO ATTACCO FEMMINA, PTO MS = PTO ATTACCO MASCHIO, 3P = ATTACCO A 3 PUNTI, ST = SOLO TUBI IDRAULICI.

SF100 XX

CUTMAC[®]

TOP PERFORMANCE



CE

DOCMA[®]



SF100 XX

EXTREME FORCE
FORZA ESTREMACYLINDER CAPACITY:
CORSA CILINDRO:
500 mmCUT CAPACITY:
ALTEZZA TAGLIO:
545 mmOIL QUANTITY:
QUANTITA' OLIO:
13 lWEDGE STROKE:
CORSA COLONNA:
ADJUSTABLE / REGOLABILEWEIGHT:
PESO:
154 kg

CODE	VERSION	TECHNICAL DATA	TONS	MEASURES:
920023	SF100 220 XX	EL. HP3 (2,2 kW) - 220 V - PS	8,00	74X66X114 cm
920024	SF100 380 XX	EL. HP3 (2,2 kW) - 380 V - PS	8,00	74X66X114 cm
920025	SF100 380/4 XX	EL. HP4 (3,0 kW) - 380 V - PS	8,00	74X66X114 cm
920026	SF100 RAPID 220 XX	EL. HP3 (2,2 kW) - 220 V - DP	8,00	74X66X114 cm
920027	SF100 RAPID 380 XX	EL. HP3 (2,2 kW) - 380 V - DP	8,00	74X66X114 cm
920028	SF100 RAPID 380/4 XX	EL. HP4 (3,0 kW) - 380 V - DP	8,00	74X66X114 cm
920029	SF100 PTO F XX	PTO FM - PS	8,00	74X66X114 cm
920030	SF100 PTO XX	PTO MS - 3P - PS	8,00	84X72X114 cm
920031	SF100 220+PTO XX	EL. HP3 - 220 V - PS - PTO MS - 3P	8,00	84X72X114 cm
920032	SF100 380+PTO XX	EL. HP3 - 380 V - PS - PTO MS - 3P	8,00	84X72X114 cm
920033	SF100 380/4+PTO XX	EL. HP4 - 380 V - PS - PTO MS - 3P	8,00	84X72X114 cm
920034	SF100 RAPID 220+PTO XX	EL. HP3 - 220 V - DP - PTO MS - 3P	8,00	84X72X114 cm
920035	SF100 RAPID 380+PTO XX	EL. HP3 - 380 V - DP - PTO MS - 3P	8,00	84X72X114 cm
920036	SF100 RAPID 380/4+PTO XX	EL. HP4 - 380 V - DP - PTO MS - 3P	8,00	84X72X114 cm
920037	SF100 BENZ ROBIN XX	SC. ROBIN HP6 - 170 cc - PS	8,00	84X66X114 cm
920038	SF100 RAPID BENZ ROBIN XX	SC. ROBIN HP6 - 170 cc - DP	8,00	84X66X114 cm

CAUTION: PS = SINGLE PUMP - DP = DOUBLE PUMP - EL = ELECTRIC MOTOR - SC = ENGINE POWERED - PTO FM = FEMALE JUNCTION TO TRACTOR - PTO MS = PTO MALE JUNCTION TO TRACTOR - 3P = 3 LINKS - ST = CONNECTION WITH HYDRAULIC PIPES.

LEGENDA: PS = POMPA SINGOLA, DP = DOPPIA POMPA, EL = MOTORE ELETTRICO, SC = MOTORE A SCOPPIO, PTO FM = PTO ATTACCO FEMMINA, PTO MS = PTO ATTACCO MASCHIO, 3P = ATTACCO A 3 PUNTI, ST = SOLO TUBI IDRAULICI.

SF110 XX

CUTMAC[®]

TOP PERFORMANCE



CE

DOCMA[®]



SF110 XX

EXTREME FORCE
FORZA ESTREMA

CYLINDER CAPACITY: CORSA CILINDRO: 500 mm		CUT CAPACITY: ALTEZZA TAGLIO: 545 mm	OIL QUANTITY: QUANTITA' OLIO: 18 l	WEDGE STROKE: CORSA CILINDRO: ADJUSTABLE / REGOLABILE	WEIGHT: PESO: 210 kg
CODE	VERSION	TECHNICAL DATA		TONS	MEASURES:
930050	SF110 220 XX	EL. HP3 (2,2 kW) - 220 V - PS		8,00	90X66X222 cm
930051	SF110 380 XX	EL. HP3 (2,2 kW) - 380 V - PS		8,00	90X66X222 cm
930052	SF110 380/4 XX	EL. HP4 (3,0 kW) - 380 V - PS		8,00	90X66X222 cm
930053	SF110 RAPID 220 XX	EL. HP3 (2,2 kW) - 220 V - DP		8,00	90X66X222 cm
930054	SF110 RAPID 380 XX	EL. HP3 (2,2 kW) - 380 V - DP		8,00	90X66X222 cm
930055	SF110 RAPID 380/4 XX	EL. HP4 (3,0 kW) - 380 V - DP		8,00	90X66X222 cm
930056	SF110 PTO F XX	PTO FM - 3P - PS		8,00	94X72X222 cm
930057	SF110 PTO XX	PTO MS - 3P - PS		8,00	98X72X222 cm
930058	SF110 220+PTO XX	EL. HP3 - 220 V - PS - PTO MS - 3P		8,00	98X72X222 cm
930059	SF110 380+PTO XX	EL. HP3 - 380 V - PS - PTO MS - 3P		8,00	98X72X222 cm
930060	SF110 380/4+PTO XX	EL. HP4 - 380 V - PS - PTO MS - 3P		8,00	98X72X222 cm
930061	SF110 RAPID 220+PTO XX	EL. HP3 - 220 V - DP - PTO MS - 3P		8,00	98X72X222 cm
930062	SF110 RAPID 380+PTO XX	EL. HP3 - 380 V - DP - PTO MS - 3P		8,00	98X72X222 cm
930063	SF110 RAPID 380/4+PTO XX	EL. HP4 - 380 V - DP - PTO MS - 3P		8,00	98X72X222 cm
930064	SF110 RAPID BENZ ROBIN XX	SC. ROBIN HP6 - 170 cc - DP		8,00	98X70X222 cm

CAUTION: PS = SINGLE PUMP - DP = DOUBLE PUMP - EL = ELECTRIC MOTOR - SC = ENGINE POWERED - PTO FM = FEMALE JUNCTION TO TRACTOR - PTO MS = PTO MALE JUNCTION TO TRACTOR - 3P = 3 LINKS - ST = CONNECTION WITH HYDRAULIC PIPES.

LEGENDA: PS = POMPA SINGOLA, DP = DOPPIA POMPA, EL = MOTORE ELETTRICO, SC = MOTORE A SCOPPIO, PTO FM = PTO ATTACCO FEMMINA, PTO MS = PTO ATTACCO MASCHIO, 3P = ATTACCO A 3 PUNTI, ST = SOLO TUBI IDRAULICI.



SF130 XX

VERTICAL
VERTICALE

CYLINDER CAPACITY: CORSA CILINDRO: 1000 mm		CUT CAPACITY: ALTEZZA TAGLIO: 1210 mm		OIL QUANTITY: QUANTITA' OLIO: 21 l		WEDGE STROKE: CORSA CILINDRO: ADJUSTABLE / REGOLABILE		WEIGHT: PESO: 300 kg	
CODE	VERSION	TECHNICAL DATA				TONS	MEASURES:		
940030	SF130 RAPID 220 XX	EL. HP3 (2,2 kW) - 220 V - DP - 3P				13,00	110X95X265 cm		
940031	SF130 380 XX	EL. HP5,5 (4,1 kW) - 380 V - PS - 3P				13,00	110X95X265 cm		
940032	SF130 PTO F XX	PTO FM - 3P - PS				13,00	110X95X265 cm		
940033	SF130 PTO XX	PTO MS - 3P - PS				13,00	110X95X265 cm		
940034	SF130 RAPID 220+PTO XX	EL. HP3 - 220 V - DP + PTO MS - 3P				13,00	110X95X265 cm		
940035	SF130 380+PTO XX	EL. HP5,5 - 380 V - PS + PTO MS - 3P				13,00	110X95X265 cm		
940036	SF130 RAPID BENZ ROBIN XX	SC. ROBIN HP9 - 270 cc - DP				13,00	110X95X265 cm		
940037	SF130 ST XX	HYDRAULIC PIPES / TUBI IDRAULICI 1,5 m				13,00*	110X95X265 cm		

CAUTION: PS = SINGLE PUMP - DP = DOUBLE PUMP - EL = ELECTRIC MOTOR - SC = ENGINE POWERED - PTO FM = FEMALE JUNCTION TO TRACTOR - PTO MS = PTO MALE JUNCTION TO TRACTOR - 3P = 3 LINKS - ST = CONNECTION WITH HYDRAULIC PIPES.

LEGENDA: PS = POMPA SINGOLA, DP = DOPPIA POMPA, EL = MOTORE ELETTRICO, SC = MOTORE A SCOPPIO, PTO FM = PTO ATTACCO FEMMINA, PTO MS = PTO ATTACCO MASCHIO, 3P = ATTACCO A 3 PUNTI, ST = SOLO TUBI IDRAULICI.

* MAXIMUM PRESSURE / PRESSIONE MASSIMA RAGGIUNGIBILE.



SF180 XX

VERTICAL
VERTICALE

CYLINDER CAPACITY: CORSA CILINDRO: 1000 mm		CUT CAPACITY: ALTEZZA TAGLIO: 1210 mm	OIL QUANTITY: QUANTITA' OLIO: 21 l	WEDGE STROKE: CORSA CILINDRO: ADJUSTABLE / REGOLABILE	WEIGHT: PESO: 360 kg
CODE	VERSION	TECHNICAL DATA		TONS	MEASURES:
940038	SF180 RAPID 220 XX	EL. HP3 (2,2 kW) - 220 V - DP - 3P		16,00	110X95X265 cm
940039	SF180 380 XX	EL. HP5,5 (4,1 kW) - 380 V - PS - 3P		18,00	110X95X265 cm
940040	SF180 PTO F XX	PTO FM - 3P - PS		18,00	110X95X265 cm
940041	SF180 PTO XX	PTO MS - 3P - PS		18,00	110X95X265 cm
940042	SF180 RAPID 220+PTO XX	EL. HP3 - 220 V - DP + PTO MS - 3P		18,00	110X95X265 cm
940043	SF180 380+PTO XX	EL. HP5,5 - 380 V - PS + PTO MS - 3P		16-18	110X95X265 cm
940044	SF180 RAPID BENZ ROBIN XX	SC. ROBIN HP9 - 270 cc - DP		18,00	110X95X265 cm
940045	SF180 ST XX	HYDRAULIC PIPES / TUBI IDRAULICI 1,5 m		18,00*	110X95X265 cm

CAUTION: PS = SINGLE PUMP - DP = DOUBLE PUMP - EL = ELECTRIC MOTOR - SC = ENGINE POWERED - PTO FM = FEMALE JUNCTION TO TRACTOR - PTO MS = PTO MALE JUNCTION TO TRACTOR - 3P = 3 LINKS - ST = CONNECTION WITH HYDRAULIC PIPES.

LEGENDA: PS = POMPA SINGOLA, DP = DOPPIA POMPA, EL = MOTORE ELETTRICO, SC = MOTORE A SCOPPIO, PTO FM = PTO ATTACCO FEMMINA, PTO MS = PTO ATTACCO MASCHIO, 3P = ATTACCO A 3 PUNTI, ST = SOLO TUBI IDRAULICI.

* MAXIMUM PRESSURE / PRESSIONE MASSIMA RAGGIUNGIBILE.



CE



TT600

BELT TRANSMISSION
TRASMISSIONE A CINGHIE

CUT CAPACITY: APERTURA TAGLIO: 270 mm		CIRCULAR SAW: DIMENSIONI LAMA: 600 mm	TRANSMISSION: TRASMISSIONE: 2 CINGHIE / 2 BELTS	WHEELS: RUOTE: 2 X 230 mm	WEIGHT: PESO: 108 kg
CODE	VERSION	TECHNICAL DATA			MEASURES:
990004	TT600 220	EL. HP3 (2,2 kW) - 220 V - WIDIA 600 mm			80X120X116 cm
990005	TT600 380	EL. HP3 (2,2 kW) - 380 V - WIDIA 600 mm			80X120X116 cm
990006	TT600 380/4	EL. HP4 (3,0 kW) - 380 V - WIDIA 600 mm			80X120X116 cm
990007	TT600 PTO	PTO MS - 3P - WIDIA 600 mm			80X120X116 cm



CE

**BSF315****BELT TRANSMISSION
TRASMISSIONE A CINGHIE**

CUT CAPACITY: APERTURA TAGLIO: 120 mm		CIRCULAR SAW: DIMENSIONI LAMA: 315 mm	TRANSMISSION: TRASMISSIONE: 2 CINGHIE / 2 BELTS	WHEELS: RUOTE: 2 X 100 mm	WEIGHT: PESO: 88 kg
CODE	VERSION	TECHNICAL DATA			MEASURES:
990021	BSF315 220	EL. HP3 (2,2 kW) - 220 V - WIDIA 315 mm			77X109X107 cm
990022	BSF315 380	EL. HP3 (2,2 kW) - 380 V - WIDIA 315 mm			77X109X107 cm

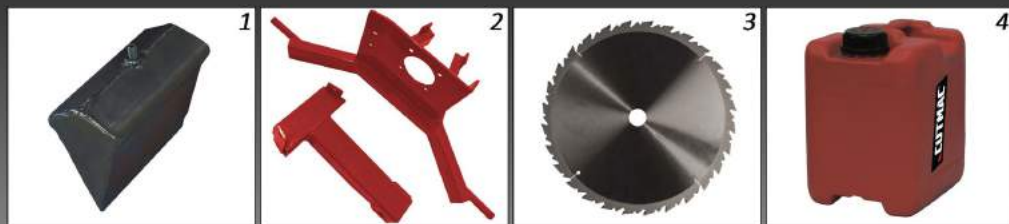


FIG.	CODE	DESCRIPTION / DESCRIZIONE
1	210007	CROSS WEDGE / CUNEO RAPIDO SF75-80-100
2	210002	3 LINKS (FOR MODELS FOR WHICH IT IS NOT PROVIDED) / ATTACCO A 3 PUNTI
3	190016	CIRCULAR SAW 315 WIDIA WL / LAMA CIRCOLARE WIDIA CL 315 mm
3	190012	CIRCULAR SAW 600 WIDIA WL / LAMA CIRCOLARE WIDIA CL 600 mm
4	110010	OIL TANK I 2 / TANICA OLIO I 2
4	110006	OIL TANK I 5 / TANICA OLIO I 5








SOG650

HORIZONTAL
ORIZZONTALE

CYLINDER CAPACITY: CORSO CILINDRO: 390 mm		CUT CAPACITY: ALTEZZA TAGLIO: 520 mm		STAND: CAVALLETTO: INCLUDED / INCLUSO		MAX Ø OF THE LOG: Ø MAX TRONCO: 250 mm		WEIGHT: PESO: 73 kg	
CODE	VERSION	TECHNICAL DATA				TONS	MEASURES:		
810050	SOG650 220	EL. HP3 (2,2 kW) - 220 V - PS				6,50	41X147X62 cm		

CAPTION: PS = SINGLE PUMP - DP = DOUBLE PUMP - EL = ELECTRIC MOTOR - SC = ENGINE POWERED - PTO FM = FEMALE JUNCTION TO TRACTOR - PTO MS = PTO MALE JUNCTION TO TRACTOR - 3P = 3 LINKS - ST = CONNECTION WITH HYDRAULIC PIPES.

LEGENDA: PS = POMPA SINGOLA, DP = DOPPIA POMPA, EL = MOTORE ELETTRICO, SC = MOTORE A SCOPPIO, PTO FM = PTO ATTACCO FEMMINA, PTO MS = PTO ATTACCO MASCHIO, 3P = ATTACCO A 3 PUNTI, ST = SOLO TUBI IDRAULICI.






SVG650 PLUS

VERTICAL VERTICALE

CYLINDER CAPACITY: CORSA CILINDRO: 500 mm		CUT CAPACITY: ALTEZZA TAGLIO: 540 mm	OIL QUANTITY: QUANTITÀ OLIO: 5 l	WEDGE STROKE: CORSA COLONNA: ADJUSTABLE / REGOLABILE	WEIGHT: PESO: 94 kg
CODE	VERSION	TECHNICAL DATA		TONS	MEASURES:
810040	SVG650 220 PLUS	EL. HP3 (2,2 kW) - 220 V - PS		6,20	70X64X112 cm

CAPTION: PS = SINGLE PUMP - DP = DOUBLE PUMP - EL = ELECTRIC MOTOR - SC = ENGINE POWERED - PTO FM = FEMALE JUNCTION TO TRACTOR - PTO MS = PTO MALE JUNCTION TO TRACTOR - 3P = 3 LINKS - ST = CONNECTION WITH HYDRAULIC PIPES.

LEGENDA: PS = POMPA SINGOLA, DP = DOPPIA POMPA, EL = MOTORE ELETTRICO, SC = MOTORE A SCOPPIO, PTO FM = PTO ATTACCO FEMMINA, PTO MS = PTO ATTACCO MASCHIO, 3P = ATTACCO A 3 PUNTI, ST = SOLO TUBI IDRAULICI.

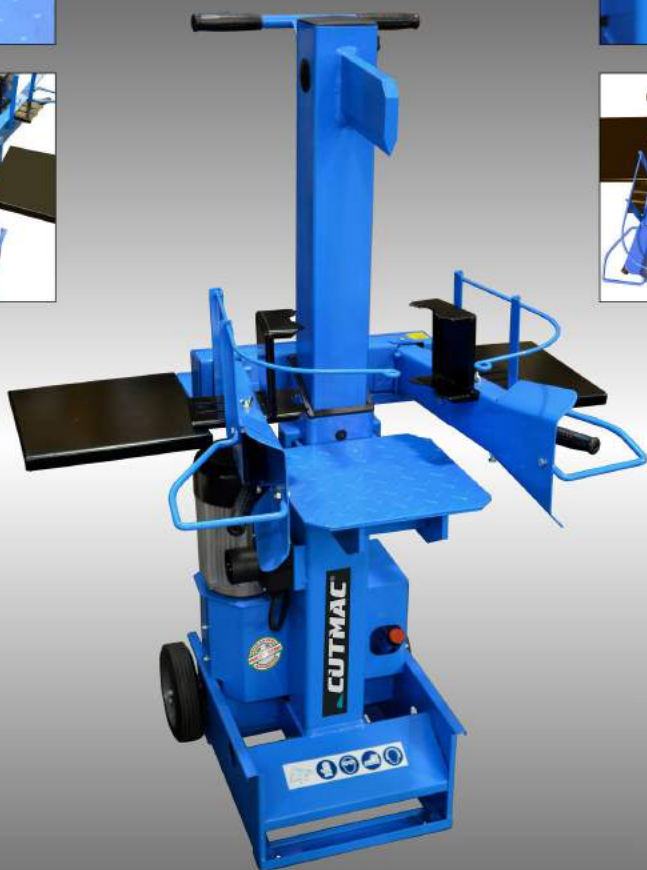

SVG700 PLUS

VERTICAL VERTICALE

CYLINDER CAPACITY: CORSA CILINDRO: 500 mm		CUT CAPACITY: ALTEZZA TAGLIO: 540 mm	OIL QUANTITY: QUANTITÀ OLIO: 5 l	WEDGE STROKE: CORSA COLONNA: ADJUSTABLE / REGOLABILE	WEIGHT: PESO: 120 kg
CODE	VERSION	TECHNICAL DATA		TONS	MEASURES:
810041	SVG700 220 PLUS	EL. HP3 (2,2 kW) - 220 V - PS		6,90	70X65X112 cm

CAPTION: PS = SINGLE PUMP - DP = DOUBLE PUMP - EL = ELECTRIC MOTOR - SC = ENGINE POWERED - PTO FM = FEMALE JUNCTION TO TRACTOR - PTO MS = PTO MALE JUNCTION TO TRACTOR - 3P = 3 LINKS - ST = CONNECTION WITH HYDRAULIC PIPES.

LEGENDA: PS = POMPA SINGOLA, DP = DOPPIA POMPA, EL = MOTORE ELETTRICO, SC = MOTORE A SCOPPIO, PTO FM = PTO ATTACCO FEMMINA, PTO MS = PTO ATTACCO MASCHIO, 3P = ATTACCO A 3 PUNTI, ST = SOLO TUBI IDRAULICI.



VERSIONE RAPID



SVG1000 PLUS

BOOSTED POTENZIATO

CYLINDER CAPACITY: CORSA CILINDRO: 500 mm		CUT CAPACITY: ALTEZZA TAGLIO: 540 mm	OIL QUANTITY: QUANTITÀ OLIO: 13 l	WEDGE STROKE: CORSA COLONNA: ADJUSTABLE / REGOLABILE	WEIGHT: PESO: 162 kg
CODE	VERSION	TECHNICAL DATA		TONS	MEASURES:
810042	SVG1000 220 PLUS	EL. HP3 (2,2 kW) - 220 V - PS		8,00	72X66X118 cm
810043	SVG1000 220 RAPID PLUS	EL. HP3 (2,2 kW) - 220 V - DP		8,00	72X66X118 cm

CAPTION: PS = SINGLE PUMP - DP = DOUBLE PUMP - EL = ELECTRIC MOTOR - SC = ENGINE POWERED - PTO FM = FEMALE JUNCTION TO TRACTOR - PTO MS = PTO MALE JUNCTION TO TRACTOR - 3P = 3 LINKS - ST = CONNECTION WITH HYDRAULIC PIPES.

LEGENDA: PS = POMPA SINGOLA, DP = DOPPIA POMPA, EL = MOTORE ELETTRICO, SC = MOTORE A SCOPPIO, PTO FM = PTO ATTACCO FEMMINA, PTO MS = PTO ATTACCO MASCHIO, 3P = ATTACCO A 3 PUNTI, ST = SOLO TUBI IDRAULICI.



SVG1100 PTO

**VERTICAL
VERTECALE**

CYLINDER CAPACITY: CORSA CILINDRO: 960 mm		CUT CAPACITY: ALTEZZA TAGLIO: 1000 mm		OIL QUANTITY: QUANTITÀ OLIO: 12 l		LOG LIFTER: SOLLEVATRONCHI: STANDARD / DI SERIE		WEIGHT: PESO: 254 kg	
CODE	VERSION	TECHNICAL DATA				TONS	MEASURES:		
810051	SVG1100 PTO	PTO MS - 3P				11,00	110X95X247 cm		

CAPTION: PS = SINGLE PUMP - DP = DOUBLE PUMP - EL = ELECTRIC MOTOR - SC = ENGINE POWERED - PTO FM = FEMALE JUNCTION TO TRACTOR - PTO MS = PTO MALE JUNCTION TO TRACTOR - 3P = 3 LINKS - ST = CONNECTION WITH HYDRAULIC PIPES.

LEGENDA: PS = POMPA SINGOLA, DP = DOPPIA POMPA, EL = MOTORE ELETTRICO, SC = MOTORE A SCOPPIO, PTO FM = PTO ATTACCO FEMMINA, PTO MS = PTO ATTACCO MASCHIO, 3P = ATTACCO A 3 PUNTI, ST = SOLO TUBI IDRAULICI.

MORE...

CUTMAC®

& ALTRO...



CODE	VERSION	TECHNICAL DATA	MEASURES:
810017	ALG120 220	EL. 85 W - 220 V - DISC / DISCO 108 mm	26X24X33 cm
810046	ALG125 LION	BATTERY 18 V/2 Ah - DISC / DISCO 108 mm	26X24X33 cm
810035	ALG135 220	EL. 160 W - 220 V - DISC / DISCO 145 mm	37X25X37 cm
810008	ALG145 220	EL. 230 W - 220 V - DISC / DISCO 145 mm	38X26X47 cm
810031	ALG150 220 PRO	EL. 230 W - 220 V - DISC / DISCO 145 mm	38X28X50 cm
810005	BSG315 220	EL. 2000 W - 220 V - WIDIA 315 mm	99X61X107 cm



Docma Srl
Via dell'Artigianato, 14
37057 San Giovanni Lupatoto
Verona - Italy
Tel. + 39 045 8732006
Fax + 39 045 8739889
E-mail: info@docma.it
www.docma.it



Retailer Rivenditore

